



Xenon IlluminatorTM

INSTRUCTION MANUAL

TX-75 TX-125

Amstech Incorporated

340 Dewpoint Lane
Alpharetta, GA 30022 U.S.A.
Tel: +1-770-840-8039 Fax: +1-770-840-0269
[Http://www.aimshot.com](http://www.aimshot.com) aimshot@aimshot.com

North America Distributor
Prestige Law Enforcement, Inc.
1575 Hwy. 411 N.E., Suite 107B
Catersville, GA 30121 U.S.A.
Tel: +1-770-387-4342 Fax: +1-770-387-0114



Patent Pending



TX-125 shown above. TX-75 only has two batteries.

Optional Accessories Available:

FL-7010 Tactical Pad

FL-7011 Extension Switch

FL-7012 Tactical Flashlight Glove

FL-7016 Replacement Bulb for TX-75

FL-7018 Replacement Bulb for TX-125

FMT-7015 Rifle/Shotgun Mount System

***MT-61178 Laser Sight and Flashlight
Mount System***

Specifications:


Model	TX-75	TX-125
Lumens	120	165
Lithium Batteries	Two 123	Three 123
Runtime @ 70°F (20°C)	90 min.	90 min.
Length	4.9" (125mm)	6.25" (159mm)
Weight (w/o Batteries)	3.25 oz. (101g)	4.25 oz. (132g)
Bezel Diameter	1.12"	1.12"
Infrared Filter (Optional)	FL-2938	FL-2938
Body Material	Aerospace Aluminum w/Rubber Grip	Aerospace Aluminum w/Rubber Grip
Waterproof	100m	100m

5

Instructions:

1. Unscrew bottom cap and insert batteries as shown in diagram.
2. To put flashlight in on position, screw bottom cap in all the way until flashlight turns on.
3. To have the flashlight turn on only when button on bottom cap is pushed, screw cap on until flashlight turns on then unscrew a little until flashlight turns off. Push the button on the bottom cap to turn on flashlight.
4. Screw lens cover clockwise or counter-clockwise to adjust focus.

2

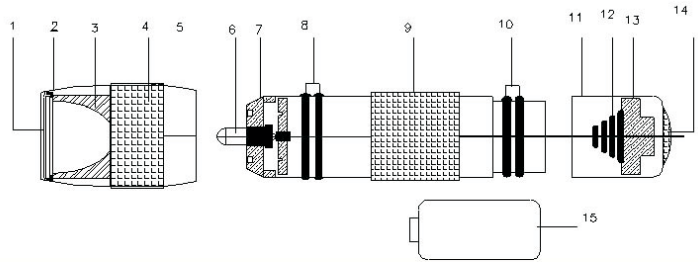

1. High Temperature Lens
2. Waterproof Seal
3. Metal Reflector
4. Lens Cap Grip
5. Lens Cap
6. Xenon Bulb
7. Machined Aluminum Bulb Base
8. Waterproof Seals
9. Molded Rubber Grip
10. Waterproof Seals
11. Molded Rubber Grip Bottom Cap
12. Battery Spring
13. Inner Switch
14. Rubber Switch Cap
15. Lithium Battery

3

4